

SECTION

# O




CHS Controls AB  
Tel +46 42 38 61 00, Fax +46 42 38 61 29  
chs@chscontrols.se www.chscontrols.se

# Weatherproof Covers and Boxes

## Table of contents

<b>Weatherproof product families</b>	O-2	<b>Non-metallic weather protective covers</b>	O-10
<b>NEC compliance</b>	O-4	Weatherproof receptacle covers	O-10
<b>Weatherproof receptacle covers</b>	O-5	Weatherproof switch covers	O-10
Deluxe weatherproof covers for FS/FD boxes	O-5	Protective receptacle covers	O-10
Standard weatherproof covers for FS/FD boxes	O-5		
Weatherproof covers for 30A, 50A & 60A straight blade receptacles	O-6	<b>Metal weatherproof covers</b>	O-11
Weatherproof covers for 50A locking devices in FS/FD boxes	O-6	<b>Weatherproof covers with devices</b>	O-12
Weatherproof covers for power-lock devices in FS/FD boxes	O-6	<b>1-Gang weatherproof boxes</b>	O-13
Weatherproof nylon covers for 15A, 20A & 30A devices	O-7	Cast aluminum FS boxes	O-13
		Non-metallic FS box	O-13
<b>Weatherproof while-in-use covers</b>	O-7	<b>Harsh environment receptacles</b>	O-14
Metal weatherbox	O-7	<b>Weather protective boots</b>	O-15
Extra duty while-in-use covers	O-8	Plug and connector weather protective boots	O-15
While-in-use covers	O-9	50A pro grip plug & connector weather protective boots	O-15

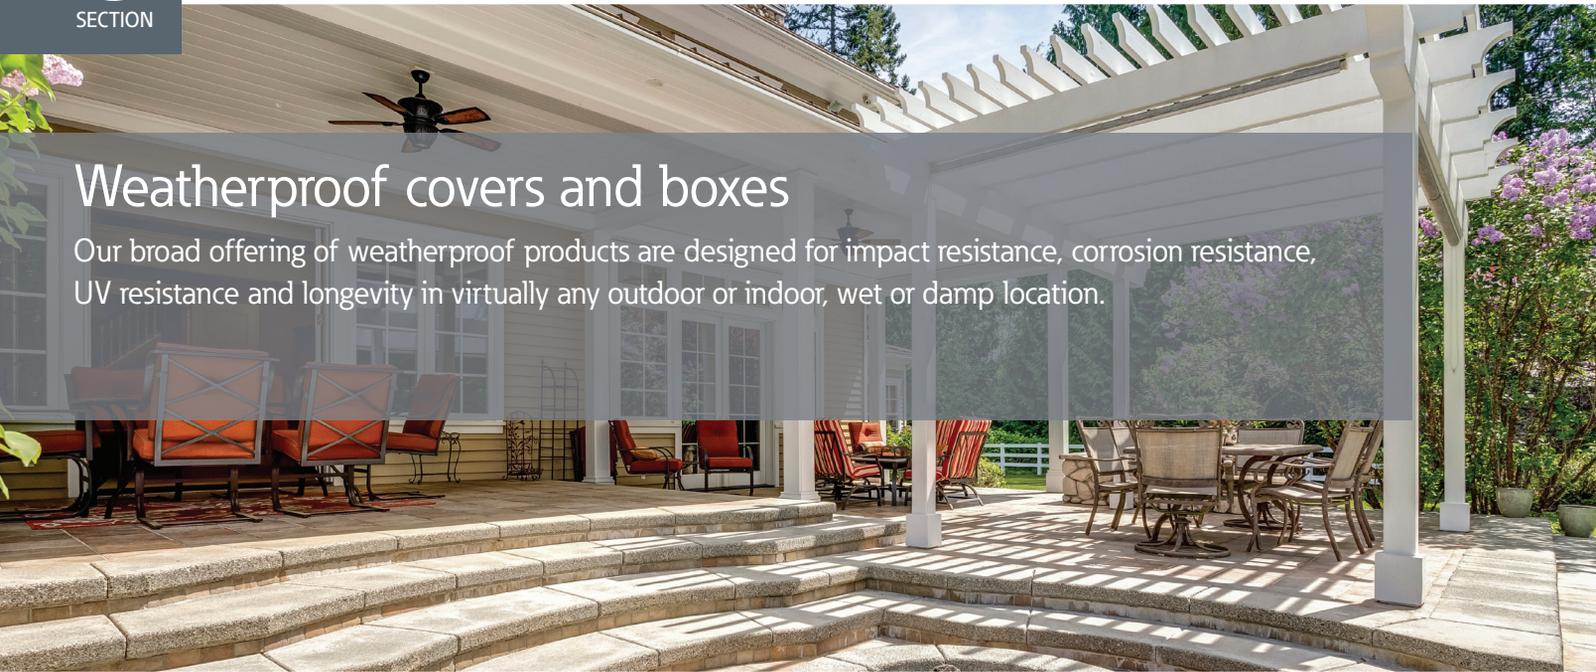

## Weatherproof covers and boxes

Our broad offering of weatherproof products are designed for impact resistance, corrosion resistance, UV resistance and longevity in virtually any outdoor or indoor, wet or damp location.

### Weather proof covers and boxes families

#### Deluxe weatherproof covers

Corrosion resistant diecast aluminum, self-closing design provides superior protection in wet and damp locations. Meets 2017 and 2020 NEC® 406.9 (A) and 406.9 (B)(2).



O-5

#### Weatherproof nylon covers

UL Listed for wet and damp locations, these rugged glass reinforced nylon covers provide protection for both straight blade and locking applications. Meets 2017 and 2020 NEC® 406.9 (A) and 406.9 (B)(2).



O-6

#### Metal weatherbox while-in-use covers

Diecast aluminum construction with NEMA Type 3R rating, meets 2017 and 2020 NEC® 406.9 (B) (1), and protects electrical connections while-in-use.



O-7

#### Non-metallic while-in-use covers

Rugged, UV-resistant construction that meets NEC 406.9 (B) (1) extra duty requirements and protects electrical connections while-in-use



O-9

#### Non-metallic weatherproof covers

UL Listed for wet locations with cover closed these rugged covers resist high impact and sunlight. Meets 2017 and 2020 NEC® 406.9 (A) and 406.9 (B)(2).



O-10

#### Weatherproof switch cover

Provides protection for switching in wet or damp locations. Meets 2017 and 2020 NEC® 404.4.



O-10

#### Cast aluminum FS boxes

Powder coated finish for exceptional durability.



O-13

#### Watertight receptacles

Rugged design for while-in-use applications per 2017 and 2020 NEC® 406.9 (B). Must be used with watertight plugs. Also meets "extra-duty" requirements.



O-14

#### Weather protective boots

Provide protection from the elements for plugs & connector bodies ranging




O-15

# The Eaton difference

## Tough environments require tough solutions

- While-in-use boxes offer complete protection of electrical connections, even when cords are plugged in
- Award-winning design offers superior functionality with patented polycarbonate movable hinges that permit easy horizontal or vertical mounting
- Durable one-piece corrosion resistant polycarbonate cover offers additional strength and weather protection
- Deep, see-through design of cover offers plenty of space for plugs and cords along with easy visual access
- Easy to open/close with a lockable clasp
- Pre-applied gasket makes it easy to mount box properly
- Cord opening fits #12 AWG or lighter cords
- Three easy-to-install molded insets for use with decorator devices, duplex or single receptacles, and toggle switches

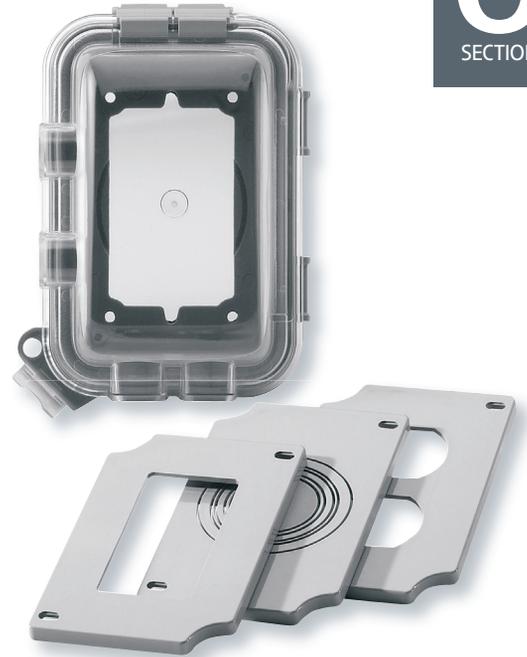

## Specific weather protective cover solutions for today's needs



### Code compliance

The 2017 and 2020 NEC® Article 406.9 (B)(1) requires receptacles located outdoors on all dwellings in wet locations to be installed in enclosures that are weatherproof with or without a plug inserted.

See page O-9



Shown:  
WIU-1



### Weatherproof switch protection

Boat houses and lifts are challenging corrosive environments for switches that need to be protected yet functional. Weather protective switch covers are also lockable for security.

See page O-10



Shown:  
S2983



### "Protective only" covers

These covers offer "damp location" protection in partially protected outdoor areas such as covered open porches or gazebos and interior areas such as basements or barns.

See page O-10



Shown:  
S1962



**Wet locations for 15A and 20A receptacles  
NEC® 406.9**

The NEC defines wet locations as installations underground or in concrete slabs or masonry in direct contact with the earth; in locations subject to saturation with water or other liquids, such as vehicle washing areas; and in unprotected locations exposed to weather.

**NEC® article 406.9 (B)(1)** requires all 15- and 20-ampere, 125- and 250-volt receptacles installed in a wet location to have an enclosure that is weatherproof whether or not the plug is inserted. These receptacles must use a while-in-use cover.

**Applicable Arrow Hart products:**

WIU-1	WIU-1D	WIU-2	WIUMV-1	WIUMH-1
-------	--------	-------	---------	---------



**Wet locations for other receptacles  
NEC® 406.9 (B)(2)**

All other receptacles installed in a wet location shall comply with (B)(2)(a) or (B)(2)(b).

(a) A receptacle installed in a wet location, where the product intended to be plugged into it is not attended while in use, shall have an enclosure that is weatherproof with the attachment plug inserted or removed.

(b) A receptacle installed in a wet location where the product intended to be plugged into it will be attended while in use (e.g. portable tools) shall have an enclosure that is weatherproof when the attachment plug is removed.

**Applicable Arrow Hart products:**

WLRS1	7420CR	7770	20416D	S1952	S2966	S989
WLRS2	7420A	7788	WP1	S1954	S3966	S966
AH7879	5741NS	20446N	WP2	S2962	S992	S1966
7420	7420C	20416N	S1951	S3962	S994	S993



**Damp locations for receptacles  
NEC® 406.9 (A)**

A damp location is defined as a location protected from weather and not subject to saturation with water or other liquids but subject to moderate degrees of moisture. Examples of such locations include partially protected locations under canopies, marquees, roofed pen porches, and like locations, and interior locations subject to moderated degrees of moisture, such as basements, barns, and cold storage buildings.

**NEC® article 406.9 (A)** requires receptacles installed in damp locations to have an enclosure for the receptacle that is weatherproof when the receptacle is covered (attachment plug is not inserted and receptacle cover is closed).

An installation suitable for wet locations shall also be considered suitable for damp locations.

Therefore, all catalog numbers noted for compliance to 406.9 (B)(1) and 406.9 (B)(2) are also suitable for use in damp locations.

**Applicable Arrow Hart products:**

S1961	S1962
-------	-------



**Wet or damp locations for switches  
NEC® 404.4**

A surface-mounted switch or circuit breaker in a damp or wet location shall be enclosed in a weatherproof enclosure, and flush-mounted switches and circuit breakers in damp or wet locations shall be equipped with a weatherproof cover.

**Applicable Arrow Hart products:**

S983	S984	S2983	S3999
------	------	-------	-------

Compliances, specifications and availability are subject to change without notice.

## Industrial specification grade device covers

### Product description

Metal covers for FS/FD boxes


### Deluxe weatherproof covers for FS/FD boxes

#### Features

- UL Listed for wet locations (cover closed) and damp locations (cover open or closed)
- Meets 2017 and 2020 NEC® 406.9 (A) and 406.9 (B)(2)(b)
- Diecast copper free aluminum with epoxy finish provides maximum corrosion resistance
- Self-closing spring door assures full protection
- EPDM gasketing material on WLRD1 and WLRS1 provide excellent resistance to ozone, weathering and temperatures from -46°C to 127°C (-50°F to 260°F)




WLRD1

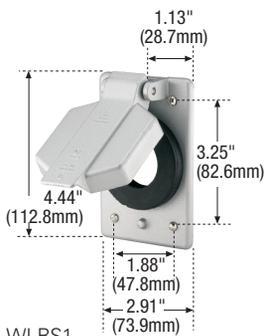

WLRS1



7420

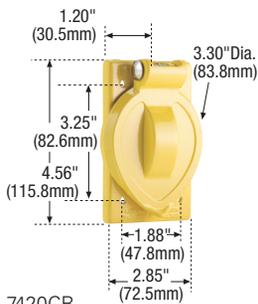

7420CR

### Diecast aluminum receptacle covers

Description	Catalog no.
Duplex receptacle cover, horizontal mounting	<input type="checkbox"/> WLRD1
Single receptacle cover, vertical mounting, 1.38" (34.9mm) face diameter, use with 15A, 20A straight blade and 15A locking receptacles	<input type="checkbox"/> WLRS1
Single receptacle cover, vertical mounting, 1.56" (39.7mm) face diameter, use with 20A and 30A locking receptacles	<input type="checkbox"/> WLRS2

### Standard weatherproof covers for FS/FD boxes

#### Features

- UL Listed for wet locations (cover closed) and damp locations (cover open or closed)
- Meets 2017 and 2020 NEC® 406.9 (A) and 406.9 (B)(2)
- Self-closing spring door assures full protection
- Gasketing material provides excellent resistance to weather
- Duplex covers can be used with any duplex receptacle

### Diecast aluminum receptacle covers

Description	Catalog no.	
Single receptacle cover, vertical mounting, 1.38-1.56" (34.9-39.7mm) face diameter, use with 15A and 20A single straight blade receptacles and 15A, 20A and 30A single locking receptacles	<input type="checkbox"/> 7420	•
Single receptacle cover, vertical mounting, 1.38-1.56" (34.9-39.7mm) face diameter, yellow corrosion resistant finish, used with 15A and 20A single straight blade receptacles and 15A, 20A and 30A single locking receptacles	<input type="checkbox"/> 7420CR	•
Single receptacle, vertical mounting for 2.12" (53.8mm) face diameter, use with 30A straight blade receptacles	<input type="checkbox"/> 7420A	•

\* Not UL Listed

Note: Cat. no. 7420, 7420CR have inserts for protecting toggle; can be used with most standard length toggle switches.

Compliances, specifications and availability are subject to change without notice.



Indicates USMCA compliant - Page Q-41

## Weatherproof receptacle covers

### Industrial specification grade device covers

#### Product description

Metal and nylon covers

#### Weatherproof covers for 30A, 50A & 60A straight blade receptacles

##### Features

- UL Listed for wet locations (cover closed) and damp locations (cover open or closed)
- Meets 2017 and 2020 NEC® 406.9 (A) and 406.9 (B)(2)
- Self-closing spring door assures full protection
- Gasketing material provides excellent resistance to weather



7788CR



20416N

#### Diecast aluminum receptacle covers

Description	Catalog no.
Weatherproof lift lid cover for 4.69" (119.10mm) flush box, use box 2.125" (53.96mm) deep or larger	□ 5741NS*
Weatherproof lift lid cover for FS/FD boxes, use box 2.125" (53.96mm) deep or larger	□ 7420C

\* Not UL Listed

#### Weatherproof covers for 50A locking devices in FS/FD boxes

##### Features

- UL Listed for wet locations (cover closed) and damp locations (cover open or closed)
- Meets 2017 and 2020 NEC® 406.9 (A) and 406.9 (B)(2)
- Self-closing spring door assures full protection
- Gasketing material provides excellent resistance to weather

#### Diecast aluminum & glass-filled nylon covers

Description	Color	Catalog no.	
Diecast aluminum lift lid cover	Diecast aluminum	□ 7770	•
Glass-filled nylon lift lid cover	Y	□ 7788CR	•
Glass-filled nylon lift lid cover	BK	□ 7788BK	•
Glass-filled nylon lift lid cover	GY	□ 7788GY	•

#### Weatherproof covers for power-lock devices in FS/FD boxes

##### Features

- UL Listed for wet locations (cover closed) and damp locations (cover open or closed)
- Meets 2017 and 2020 NEC® 406.9 (A) and 406.9 (B)(2)
- Self-closing spring door assures full protection
- Gasketing material provides excellent resistance to weather

#### Diecast aluminum & glass-filled nylon covers

Description	Color	Catalog no.	
Glass-filled nylon lift lid cover for 4-wire 30A receptacles	RD	□ 20446N	•
Glass-filled nylon lift lid cover for 4-wire 30A receptacles	GY	□ 20416N	•
Lift lid cover for 4-wire 30A receptacles	Diecast aluminum	□ 20416D	•

\* cULus Listed

#### Color information:

BK (Black), GY (Gray), RD (Red), Y (Yellow)



Compliances, specifications and availability are subject to change without notice.

 Indicates USMCA compliant - Page Q-41

## Weatherproof covers for locking and straight blade receptacles

### Product description

Nylon covers for FS/FD boxes

### Weatherproof nylon covers for 15A, 20A & 30A devices

#### Features

- UL Listed for wet locations (cover closed) and damp locations (cover open or closed)
- Meets 2017 and 2020 NEC® 406.9 (A) and 406.9 (B)(2)
- Rugged, glass-filled nylon provides high strength and wide temperature range for long life in abusive environments
- Easy mounting on FS/FD boxes or equipment panels
- Self-closing lift lid cover with neoprene gasket and stainless steel spring provides weather-proof protection
- Universal mounting holes to accept all Eaton's 15 & 20A and 30A locking flanged inlets and outlets, receptacles as well as devices with similar dimensions from other manufacturers



WP1



WP2

### Glass-filled nylon covers



Description	Mtg. hole pattern	Color	Opening diameter	Catalog no.	
For 15 & 20A straight blade receptacles and 15A flanged inlets & outlets	2 holes 180°, 2.09" (53.1mm) bolt dia. circle	GY	1.75" (44.45mm)	□ WWP1	•
For 20 & 30A flanged inlets & outlets and 30 & 50A, 3-W straight blade receptacles	Two sets of 3 equally spaced holes: 3 holes on 2.5" (63.5mm) bolt dia. circle and 3 holes on 2.69" (68.3mm) bolt dia. circle	GY	2.25" (57.15mm)	□ WWP2	•

## Metal weatherbox while-in-use weather protective boxes

### Product description

Metal 1-Gang lockable cover boxes

### Metal extra-duty while-in-use cover boxes

#### Features

- Meets 2017 and 2020 NEC® 406.9 (B)(1) for receptacles in damp or wet locations for one or two family dwellings
- Diecast powder coated aluminum
- NEMA Type 3R rating
- Comes with gasket, mounting hardware, duplex receptacle insert and GFCI receptacle insert
- Lockable to prevent accidental disconnects



WIUMH-1X

### Extra duty metal while-in-use protective covers



Description	# of available config. using inserts	Color	Depth	Catalog no.	
Vertical mount	2	GY	3.29" deep (83.5mm)	□ WIUMV-1X	•
Horizontal mount	2	GY	3.29" deep (83.5mm)	□ WIUMH-1X	•

### Color information:

GY (Gray)



(Gray)

Compliances, specifications and availability are subject to change without notice.

Indicates USMCA compliant - Page Q-41

## Weatherproof while-in-use covers

### Extra duty while-in-use weather protective covers

#### Product description

- 1-Gang extra duty, self-closing
- 2-Gang extra duty, self-closing

#### Features


- Meets 2017 and 2020 NEC® 406.9 (B)(1) extra duty requirements for any application
- Rugged UV-resistant polycarbonate cover and back protects devices without cracking or breaking and is non-corrosive and non-conductive
- Self-closing cover
- Box inserts accommodate decorator devices, duplex receptacles and a variety of single receptacle sizes and toggle switches
- 1-Gang box includes 3 inserts for 16 different configurations
- 2-Gang box includes 4 inserts for over 60 different configurations
- Cord cover opening fits #12 AWG or lighter cord
- Includes pre-mounted gasket



WIU-1VX



Single gang inserts

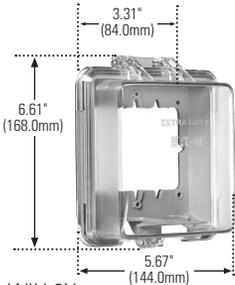

WIU-2X



2-Gang inserts


#### Extra duty

Gang	Description	Color	Catalog no.
1-Gang	Horizontal mount	GY	<input type="checkbox"/> WIU-1HX
1-Gang	Horizontal mount	W	<input type="checkbox"/> WIU-1WHX
1-Gang	Vertical mount	GY	<input type="checkbox"/> WIU-1VX
1-Gang	Vertical mount	W	<input type="checkbox"/> WIU-1VWX
2-Gang	Horizontal/vertical mount	GY	<input type="checkbox"/> WIU-2X
2-Gang	Horizontal/vertical mount	W	<input type="checkbox"/> WIU-2WX

WIU-2X & WIU-2WX: cULus Listed to UL514D, file no. E33216; meets NEMA 3R requirements

#### Color information:

GY (Gray), W (White)



**Compliances, specifications and availability are subject to change without notice.**

## WeatherBox while-in-use weather protective covers

### Product description

- 1-Gang self-closing
- 2-Gang self-closing

### Design features

- Meets 2017 and 2020 NEC® 406.9 (B)(1) extra duty requirement for any application (WIU-1X, WIU-2X series only)
- Rugged UV-resistant polycarbonate cover and back protects devices without cracking or breaking and is non-corrosive and non-conductive
- Moveable hinges reposition easily for vertical or horizontal mounting (WIU-1 only)
- 1-Gang box includes 3 inserts for 16 different configurations
- 2-Gang box includes 4 inserts for over 60 different configurations
- Box inserts accommodate decorator devices, duplex receptacles, a variety of different single receptacle sizes and toggle switches
- Exceeds UL outdoor low voltage landscape lighting requirements
- Box cover includes pre-mounted gasket
- Meets Canadian Electrical Code rule 26-702



WIU-1



WIU-1D



WIU-2

### Standard depth

Gang	Description	# of available configurations	Color	Catalog no.
1-Gang	Horizontal/vertical mount	16	GY	<input type="checkbox"/> WIU-1
1-Gang	Horizontal/vertical mount	16	W	<input type="checkbox"/> WIU-1W
2-Gang	Horizontal/vertical mount	60+	GY	<input type="checkbox"/> WIU-2
2-Gang	Horizontal/vertical mount	60+	W	<input type="checkbox"/> WIU-2W

cULus Listed to UL514D, file no. E33216, certified to CSA C22.2 no. 42; meets NEMA 3R requirements

### Extra depth

Gang	Description	# of available configurations	Color	Catalog no.
1-Gang	Horizontal/vertical mount	16	GY	<input type="checkbox"/> WIU-1D

cULus Listed to UL514D, file no. E33216, certified to CSA C22.2 no. 42; meets NEMA 3R requirements

### Color ordering information:

Base device is gray. For white, add Color suffix: W (White)



**Compliances, specifications and availability are subject to change without notice.**

## Non-metallic weatherproof covers

### Non-metallic weather protective covers

#### Product description

1-Gang self-closing, 1-Gang switch cover, 1-Gang stay open

#### Non-metallic weatherproof receptacle covers

##### Features


- UL Listed for wet locations with cover closed
- Meets 2017 and 2020 NEC® 406.9 (A) and 406.9 (B)(2)
- Tough plastic construction resistant to high impact and sunlight
- Non-corrosive and non-conductive
- Gasket provided seals both device openings and edges

#### 1-Gang self-closing lids

Description	Mounting	Color suffix	Catalog no.	
Single receptacle	Horizontal	GY, W	□ S1951__	•
Duplex receptacle/combo device 2 self-closing lids	Horizontal	GY, W	□ S1952__	•
Oversize duplex receptacle/combo device	Horizontal	GY	□ S1954	•
Duplex receptacle	Vertical	GY, W	□ S2962__	•
	Horizontal	GY, W	□ S3962__	•
GFCI/decorator	Vertical	GY, W	□ S2966__	•
	Horizontal	BK, GY, W	□ S3966__	•




S1952




S1954




S2966



S2983



S1961



S1962

#### Non-metallic weatherproof switch covers

##### Features

- Switch lockable in "ON" or "OFF" position
- Red switch handle for easy visual location
- Meets 2017 and 2020 NEC® 404.4
- Factory-attached gasket to cover minimizes labor for installer

#### 1-Gang lids

Description	Mounting	Color	Catalog no.	
1-Gang flush mount switch cover	Vertical	GY	□ S2983	•

#### Non-metallic protective receptacle covers

##### Features


- Not for use in wet locations
- Tough plastic construction resistant to high impact
- Non-corrosive and non-conductive
- Gasket provided seals both device and openings and edges

#### 1-Gang stay open lids

Description	Mounting	Color suffix	Catalog no.	
Single receptacle	Horizontal	GY, W	□ S1961__	•
Duplex receptacle/combo device	Horizontal	BK, GY, W	□ S1962__	•

#### Color ordering information:

For ordering devices, include Catalog no. followed by the Color suffix: BLK (Black), GY (Gray), W (White)



Compliances, specifications and availability are subject to change without notice.

 Indicates USMCA compliant - Page Q-41

## Metal weatherproof covers


### Product description

Metal 1-Gang self-closing covers  
1-Gang blank wallplates


### Metal weatherproof covers - wet locations

#### Features


- Meets 2017 and 2020 NEC® 406.9 (A) and 406.9 (B)(2)
- Gasket provided seals both device openings and edges
- Electrostatically painted with a baked, weather-resistant powder coat finish for exceptional durability

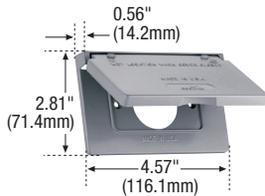

S992

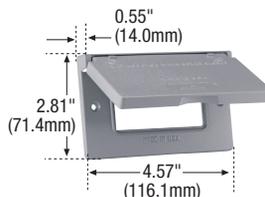

S1966

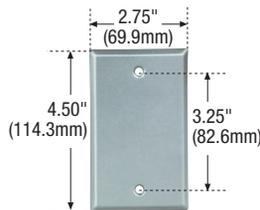

S1987

### 1-Gang self-closing lids

Description	Mounting	Color suffix	Catalog no.	
Single receptacle	Horizontal	GY	□ S992	•
Duplex receptacle	Vertical	GY	□ S994	•
Duplex receptacle, 2 self-closing lids	Horizontal	BLK, GY	□ S989__	•
GFCI/decorator receptacle	Vertical	GY	□ S966-SP	•
	Horizontal	GY	□ S1966-SP	•
20A and 30A receptacles 1.625" (41.27mm) dia. opening	Vertical	GY	□ S993-SP	•

### 1-Gang blank wallplate

Description	Mounting	Color	Catalog no.	
Blank wallplate	Horizontal or vertical	GY	□ S1987	•

### Color ordering information:

For ordering devices, include Catalog no. followed by the Color suffix: BLK (Black), GY (Gray)



Compliances, specifications and availability are subject to change without notice.

 Indicates USMCA compliant - Page Q-41

### Weatherproof covers & devices

#### Product description

Metal & plastic  
1-Gang covers



5-15P

#### Weatherproof covers - wet locations

##### Features

- UL Listed for wet locations (with cover closed S3999)
- Meets 2017 and 2020 NEC® 404.4
- Ready for outdoor installation
- Gasket seals both openings and edges

#### 1-Gang metal cover with switch

##### Switch rating

A	V/AC	Description	Mounting	Color	Catalog no.	
10	125 "T"	Single-pole toggle switch with metal switch cover	Vertical	GY	<input type="checkbox"/> S983	•
5	250	3-Way toggle switch with metal switch cover	Vertical	GY	<input type="checkbox"/> S984	•

#### 1-Gang plastic cover with motor base inlet

##### Inlet rating



A	V/AC	NEMA	Description	Mounting	Color	Catalog no.	
15	125	5-15P	Motor base inlet #5278 with weatherproof cover #3963	Horizontal	GY	<input type="checkbox"/> S3999	•

#### Accessories for specification grade receptacle covers

##### Description

Description	Catalog no.	
Cast FS box	<input type="checkbox"/> 1113	•
Non-metallic FS box	<input type="checkbox"/> 6080*	•

\*UL Listed only

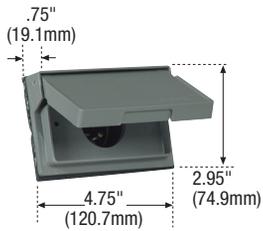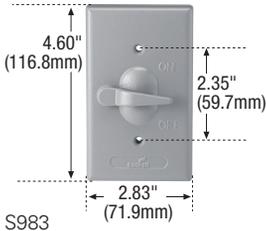

S3999



1113



6080

#### Color information:

GY (Gray)



(Gray)

Compliances, specifications and availability are subject to change without notice.

Indicates USMCA compliant - Page Q-41

# 1-Gang weatherproof boxes

## 1-Gang boxes


### Product description

Cast aluminum FS boxes  
Non-metallic FS boxes


### Cast aluminum weatherproof FS boxes

#### Features

- Electrostatically painted with a baked, weather-resistant powder finish for exceptional durability
- Accept single gang weatherproof cover and standard FS covers
- UL Listed for wet and damp locations with appropriate cover installed
- Mounting lugs provide strength and durability on any mounting surface
- Raised knockout studs on back of box provide alternative means for wall mounting. Strike desired studs with sharp hammer blow for clean mounting holes
- Easy access ground screw hole located inside back wall of box
- Threaded outlets for conduit and connectors
- Two closure plugs and mounting lugs furnished

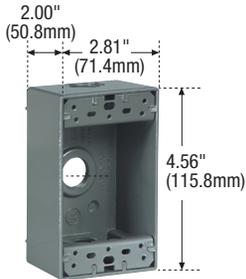


1113

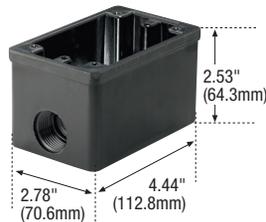


6080

### 1-Gang FS boxes


Description	End openings	Back openings	Catalog no.	
3 hole 0.50" (12.70mm) dia.	1-1	1	□ 1113	•
4 hole 0.50" (12.70mm) dia.	2-1	1	□ 1114	•
5 hole 0.50" (12.70mm) dia.	2-2	1	□ 1115	•
3 hole 0.75" (19.05mm) dia.	1-1	1	□ 1116	•
5 hole 0.75" (19.05mm) dia.	2-2	1	□ 1118	•




1113




1114



1115



1116



1118

### Non-metallic weatherproof 1-Gang FS boxes

Description	Color	Catalog no.
FS Box with (2) 0.75" (19.05mm) IPS molded-in knockouts	BK	□ 6080

### Color information:

BK (Black)



(Black)



Compliances, specifications and availability are subject to change without notice.

 Indicates USMCA compliant - Page Q-41


## Harsh environment receptacles

### Product description


Corrosion & weather resistant receptacles suitable for use with weatherproof covers & boxes

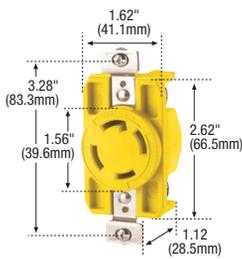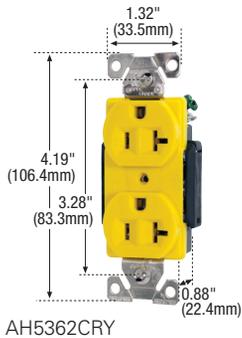

CRL1430R

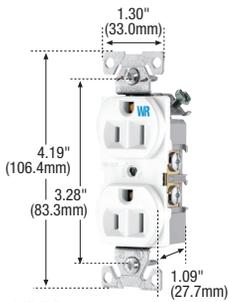

WRBR15

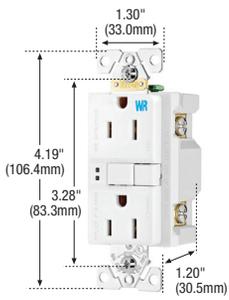

WRSFG15

### Corrosion resistant straight blade & locking receptacles



Rating	A	V/AC	NEMA	Description	Color suffix	Catalog no.	
15	125		5-15	Straight blade duplex receptacle	GY, Y	<input type="checkbox"/> AH5262CR__*	
			L5-15	Locking duplex receptacle	Y	<input type="checkbox"/> CR4700	
20	125		5-20	Straight blade duplex receptacle	GY, Y	<input type="checkbox"/> AH5362CR__*	
			L5-20	Locking single receptacle	Y	<input type="checkbox"/> CRL520R	
			250	L6-20	Locking single receptacle	Y	<input type="checkbox"/> CRL620R
			125/250	L14-20	Locking single receptacle	Y	<input type="checkbox"/> CRL1420R
30	125		3Ø 250	L15-20	Locking single receptacle	Y	<input type="checkbox"/> CRL1520R
			250	L5-30	Locking single receptacle	Y	<input type="checkbox"/> CRL530R
			250	L6-30	Locking single receptacle	Y	<input type="checkbox"/> CRL630R
			125/250	L14-30	Locking single receptacle	Y	<input type="checkbox"/> CRL1430R

For additional corrosion resistant products and information see section D - Complex environments  
 \* cULus Listed

### Watertight receptacles



A	V/AC	Description	Color	Single receptacle catalog no.	Duplex receptacle catalog no.		
15	125	5-15	Watertight receptacle, back wire	Y	<input type="checkbox"/> 60W47	<input type="checkbox"/> 60W47DPLX	•
			Watertight receptacle, back wire	BK	<input type="checkbox"/> 60W47BK	<input type="checkbox"/> 60W47DPLXBK	•
20	125	5-20	Watertight receptacle, back wire	Y	<input type="checkbox"/> 60W33	<input type="checkbox"/> 60W33DPLX	•
			Watertight receptacle, back wire	BK	<input type="checkbox"/> 60W33BK	<input type="checkbox"/> 60W33DPLXBK	•

### Weather resistant commercial grade receptacles



Rating	A	V/AC	NEMA	Description	Color suffix	Catalog no.
15	125		5-15R	Duplex receptacle, back & side wire	B, V, W	<input type="checkbox"/> WRBR15__
20	125		5-20R	Duplex receptacle, back & side wire	B, BK, V, W	<input type="checkbox"/> WRBR20__

WR receptacles comply with the requirements NEC 406.9(A) & (B)  
 Additional WR products and information on (B-7)

### Weather resistant specification grade GFCl's



Rating	A	V/AC	NEMA	Description	Color suffix	Catalog no.
15	125		5-15R	WR duplex GFCl, back & side wire	B, GY, V, W	<input type="checkbox"/> WRSFG15__
				TWR duplex GFCl, back & side wire	B, GY, LA, V, W	<input type="checkbox"/> TWRSGF15__
20	125		5-20R	WR duplex GFCl, back & side wire	B, BK, GY, V, W	<input type="checkbox"/> WRSFG20__
				TWR duplex GFCl, back & side wire	B, GY, LA, V, W	<input type="checkbox"/> TWRSGF20__

Includes standard size unbreakable wallplate unless otherwise noted  
 Additional GFCl products and information on (B-7)

### Color ordering information:

For ordering devices, include Catalog no. followed by the Color suffix: B (Brown), BK (Black), GY (Gray), LA (Light Almond), V (Ivory), W (White), Y (Yellow)



Compliances, specifications and availability are subject to change without notice.

Indicates USMCA compliant - Page Q-41    Weather resistant    Tamper & weather resistant

## Weather protective boots

### Product description

For straight blade  
& locking devices

### Features

- Neoprene resists oil, grease, and acids plus has long life properties
- Flexible and easy to apply to plug or connector
- Cord hole opening can be cut away for large diameter cords



BS1



BM1



BM2



7716EX

### Plug and connector weather protective boots

#### Product may be used with:

	Plug catalog no.	Connector catalog no.
15A and 20A, 2-pole, 3-wire straight blade and locking auto grip, safety grip devices	<input type="checkbox"/> BS1	<input type="checkbox"/> BS2
15A industrial locking devices	<input type="checkbox"/> BS1	<input type="checkbox"/> BS2
20A 2-wire industrial locking devices	<input type="checkbox"/> BS1	<input type="checkbox"/> BS2
20A and 30A 2-pole, 3-wire and 3-pole, 3-wire locking ultra grip devices	<input type="checkbox"/> BM1	<input type="checkbox"/> BM2
20A and 30A 4-wire and 5-wire industrial locking devices	<input type="checkbox"/> BL1	<input type="checkbox"/> BL2
Midget locking ML2 plugs and connectors when used with receptacle or inlet	<input type="checkbox"/> 74CM40	<input type="checkbox"/> 74CM40

### 50A pro grip plug and connector weather protective boots

#### Description

Description	Catalog no.
Short boot, for 50A pro grip connector when used with 50A pro grip plug and 7717EX boot	<input type="checkbox"/> 7716EX
Long boot, for 50A pro grip plug when used with receptacle or 50A pro grip connector and 7716EX boot	<input type="checkbox"/> 7717EX

Compliances, specifications and availability are subject to change without notice.